



38.4V 60Ah



PRODUCT (120A BMS) MANUAL

Lithium Iron Phosphate Battery (LiFePO₄)

www.litime.com



PRODUCT OVERVIEW

38.4V 60AH BATTERY

Operating Voltage: 38.4V


Charging Voltage: $43.2 \pm 0.6V$

Recommend Charge Current: 12A (0.2C)

Max. Continuous Discharge Current: 120A

Max. Continuous Output Power: For Electric Cart^①: 3000W
For Energy Storage: 4608W

① The 38.4V 60Ah battery is suitable for electric carts that speed lower than 25MI/hour (40KM/hour), such as golf carts, low-speed vehicles (LSV), all-terrain vehicles (ATV), neighborhood electric vehicles (NEV), E-trike and so on.

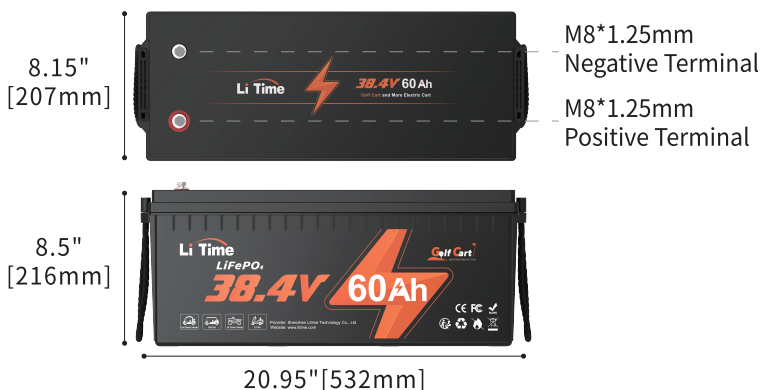


ADDITIONAL COMPONENTS

M8- 5/8" [16MM] TERMINAL BOLTS

Recommended terminal torque: 106.2 to 123.9 inch · lbs / 12 to 14 N · m.

The terminal bolts are used to secure multiple cable lugs to a single battery terminal. The bolts can be replaced with **M8** bolts of other lengths based on actual needs.



INSULATING CAPS FOR BOLTS

Cover the battery with the insulating caps after tightening the bolts. If the cap melts, stop using the battery and reach out to service@litime.com for further analysis.

BATTERY PARAMETERS

Cell Type	LiFePO ₄
Nominal Voltage	38.4V
Rated Capacity	60Ah
Energy	2304Wh
Internal Resistance	≤40mΩ
Cycle Life	≥4000 times
Battery Management System (BMS) Board	120A
Charge Method	CC/CV
Charge Voltage	43.2±0.6V
Recommend Charge Current	12A (0.2C)
Max. Continuous Charge Current	60A
Max. Continuous Discharge Current	120A
Surge Discharge Current	600A@1 second

Max. Continuous Output Power	For Electric Cart ^① : 3000W
	For Energy Storage: 4608W
Dimension	L20.95*W8.15*H8.5 inch
	L532*W207*H216 mm
Housing Material	ABS
Protection Class	IP65
Temperature Range	Charge: 0°C to 50°C / 32°F to 122°F
	Discharge: -20°C to 60°C / -4°F to 140°F
	Storage: -10°C to 50°C / 14°F to 122°F

① The 38.4V 60Ah battery is suitable for electric carts that speed lower than 25MI/hour (40KM/hour), such as golf carts, low-speed vehicles (LSV), all-terrain vehicles (ATV), neighborhood electric vehicles (NEV), E-trike and so on.


HOW TO ESTIMATE THE BATTERY CAPACITY

STATE OF CHARGE (SOC)

The battery capacity could be roughly estimated by its resting voltage (not charging/discharging voltage).^①

Since the voltage of each battery is slightly different, and the voltage measurement is affected by the measuring instrument, ambient temperature, etc., the following parameters are for reference only. The actual SOC of the battery is based on the discharge capacity under load.

Resting Voltage:The voltage is measured after the battery has been disconnected from the charger and loads with zero current, and left alone for 3 hours.

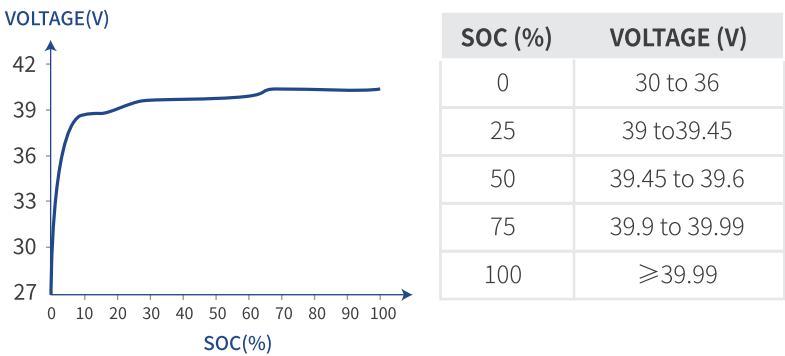

① Based on the characteristics of LiFePO₄ batteries, the voltage measured by all LiFePO₄ batteries during charging/discharging is not the real voltage of the battery. Therefore, after charging/discharging and disconnecting the battery from the power source, the voltage of the battery will gradually drop/increase to its real voltage.

PARALLEL CONNECTION

THE PREMISE OF CONNECTION


To connect in parallel, batteries should meet the below conditions:

- a. identical batteries with the same battery capacity (Ah) and BMS (A);
- b. from the same brand (as lithium battery from different brands has their special BMS);
- c. purchased in near time (within one month).


LIMITATION FOR SERIES/PARALLEL CONNECTION

Support connecting up to 4 identical batteries for up to:
36V(38.4V) 240Ah battery system.


Parallel Connection 36V(38.4V) 240Ah

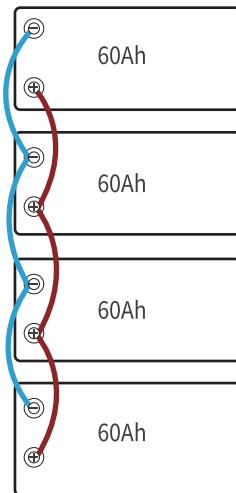

DO NOT support Series Connection



WHAT TO DO WHEN THE BATTERY STOPS WORKING?

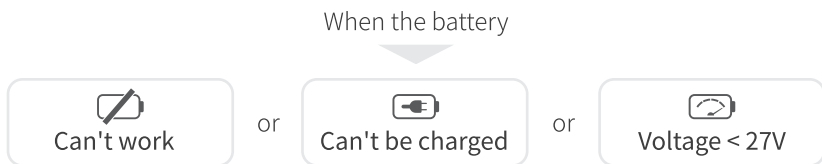

It has 85% chances that BMS has shut it off for protection, and you could try one of below ways to activate the battery.

GENERAL STEPS

If the BMS has cut off the battery for protection, follow the below steps to activate it.

Step
1

Cut off all the connections from the battery

Step
2

Leave the battery aside for 30mins

Then the battery will automatically recover itself to normal voltage ($>30V$) and can be used after fully charged.

If the battery is unable to recover itself after the above steps, please try activating by **ONE OF BELOW TWO METHODS.**

After being activated (voltage $> 30V$) and fully charged by the normal charging method, it can be used normally.

Method ①

Use a charger with lithium battery activation function to fully charge the battery.

Method ②

Connect a controller that supports 36V LiFePO₄ battery charging to charge the battery for 3~10s in sunny daytime.

Li Time

www.litime.com



Shenzhen Litime Technology Co., Ltd